

AN SERIES

AN Series 105° Two-way Regular Concealed Hinge for Aluminum Frames



Specification

Opening Angle	105°
Function	Auto Close
Plate Type	Clip On
Cup Depth	Aluminum Frame Die Cut
Cup Diameter	42/28 mm
Drilling Distance	Aluminum Frame Die Cut
Door Thickness	19 mm - 23 mm
Material	Cold Rolled Steel
Height Adjustment Range	Plate Adjustment
Overlay Adjustment Range	6 mm
Depth Adjustment Range	5 mm
Finish	Copper Nickel
Packaging	200 Units per Carton


Notable Features

- Heavy duty product.
- Designed for thin aluminum frame.
- Flush installation for minimal effect on cabinet design.

		
Full Overlay	Half Overlay	Inset
Code: ANC110F	Code: ANC110H	Code: ANC110S


Additional Options: 1P - Individual Hinge, Caps for Arm and Cup, Mounting Plate and Screws in Sealed Bag
 2P - Pair of Hinges, Caps for Arm and Cup, Mounting Plates and Screws in Sealed Bag

Drilling For Cup

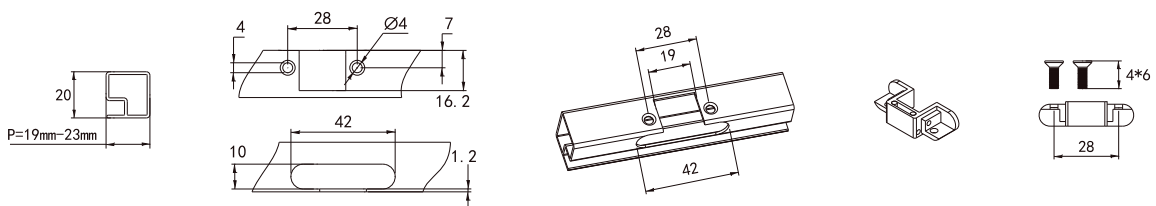

Cup Installation


Screw-on



Installation Method **Code**
 Wood Screws S4

Overlay Table


Full Overlay



$$H = -2 + P - D$$

D \ P	19	20	21	22	23
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17


Half Overlay



$$H = 12 + P - D$$

D \ P	19	20	21	22	23
0	7	8	9	10	11
2	5	6	7	8	9
4	3	4	5	6	7



Inset



$$H = 20 + P + A$$

A \ P	19	20	21	22	23
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

Minimum Reveal Table



A \ P	14	15	16	17	18	19	20	21	22
19	0,3	0,5	0,7	0,9	1,2	1,5	1,8	2,2	2,6
20	0,3	0,5	0,7	0,9	1,1	1,4	1,8	2,1	2,5
21	0,2	0,4	0,6	0,9	1,1	1,4	1,7	2,0	2,4
22	0,2	0,4	0,6	0,8	1,1	1,3	1,6	2,0	2,4
23	0,2	0,4	0,5	0,8	1,0	1,3	1,6	1,9	2,3



L \ T	K	14	15	16	17	18	19	20	21	22
3	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
4	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,2
5	0,0	0,0	0,0	0,0	0,0	0,3	0,5	0,8	1,0	
6	0,0	0,3	0,5	0,8	1,0	1,3	1,5	1,8	2,0	
7	1,0	1,3	1,5	1,7	2,0	2,2	2,5	2,7	2,9	

K = Boring distance
 P = Aluminum frame width
 T = Door thickness
 A = Minimum gap (A) for door with a door edge radius
 L = Gap between door and panel

Note:


The minimum parameters in the reveal tables are based on doors with straight, square edges. A rounded or beveled profile will change the minimum reveal required.

Hinge Adjustment

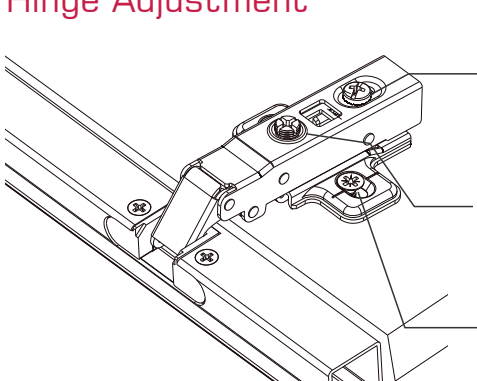


Depth Adjustment

Move the hinge laterally to adjust door gap.



Horizontal Adjustment

Rotate the hinge arm screw to increase or decrease door overlay.



Vertical Adjustment

Adjust the mounting plate to increase or decrease the door height.

Note:

The referenced adjustment range described is the product design range. The actual design of the cabinet and the drilling method may have a certain impact on the parameters.

Plate Options: DS TS FP FS FM FN YD YS YT YP